

DS-KH2230T Four-Wire HD Analog Indoor Station



The Hikvision 4-wire indoor station, with simple design, 7-inch touch screen, and physical buttons, brings you a fluent video, audio communication, and quick door opening permission. It also supports accessing to analog cameras, helps you to view the live video of the key areas and protect the security.

- 4-wire HD analog indoor station
- 7-inch TFT screen with 1280 × 720 resolution
- Physical buttons design for easier operation
- Supports three indoor stations cascading in the intercom system
- Supports remote unlocking, monitoring door station and external analog camera

▪ Specification


| Display parameters | |
|-----------------------------------|--|
| Screen size | 7-inch |
| Operation method | Physical button |
| Type | Colorful TFT |
| Resolution | 1024 × 600 |
| Audio parameters | |
| Audio input | 1 built-in omnidirectional microphone |
| Audio output | 1 built-in loudspeaker |
| Capacity | |
| Linked indoor extensions capacity | 2 |
| Linked doorphone capacity | 2 |
| Analog Camera | 1 |
| Device interfaces | |
| DIP switch | 1 Bit |
| Four-Wire interface | 4, 2 for indoor extentions, 2 for doorphones |
| Power supply input | 12V DC |
| BNC | 1 |
| Debugging port | 1 |
| General | |
| Button | 4 |
| Installation | Surface mounting |
| Indicator | / |
| Protective level | / |
| Working temperature | -10 °C to 55 °C (14 °F to 131 °F) |
| Working humidity | 10% to 90% (no-condensing) |
| Dimension (W × H × D) | 178 mm × 132 mm × 19 mm (7" × 5.20" × 0.75") |
| Battery | / |
| Application environment | Indoor |
| Power consumption | ≤ 5 W |

▪ Available Model

DS-KH2230T/DS-KIS212套装专用

DS-KH2230T

▪ Dimension

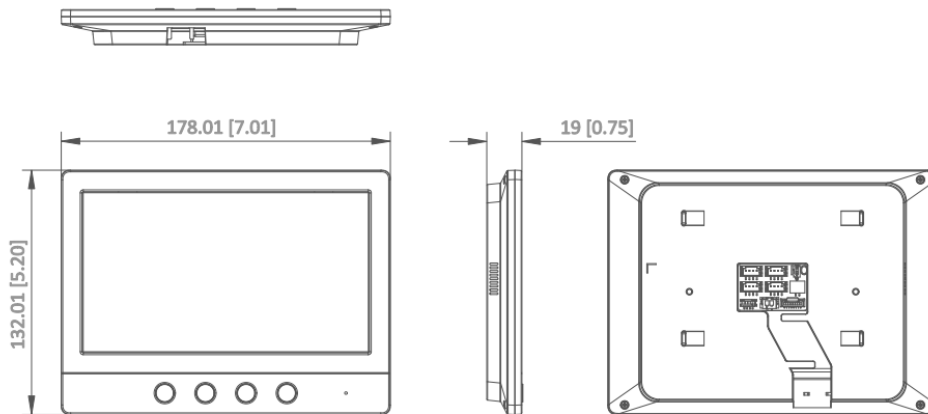

Unit:mm [inch]

| | |
|-------|-----|
| SCALE | 1:1 |
|-------|-----|

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

