

DS-KIS607-S IP Video Intercom Kit



- Convenient Hik-Connect APP Mobile Control
- One call button for easier calls
- Standard PoE power supply
- Stores messages and captured pictures in the TF card
- Including: Door station x1, Indoor station x1, PoE Switch x1, 32GB TF card x1

▪ Specification

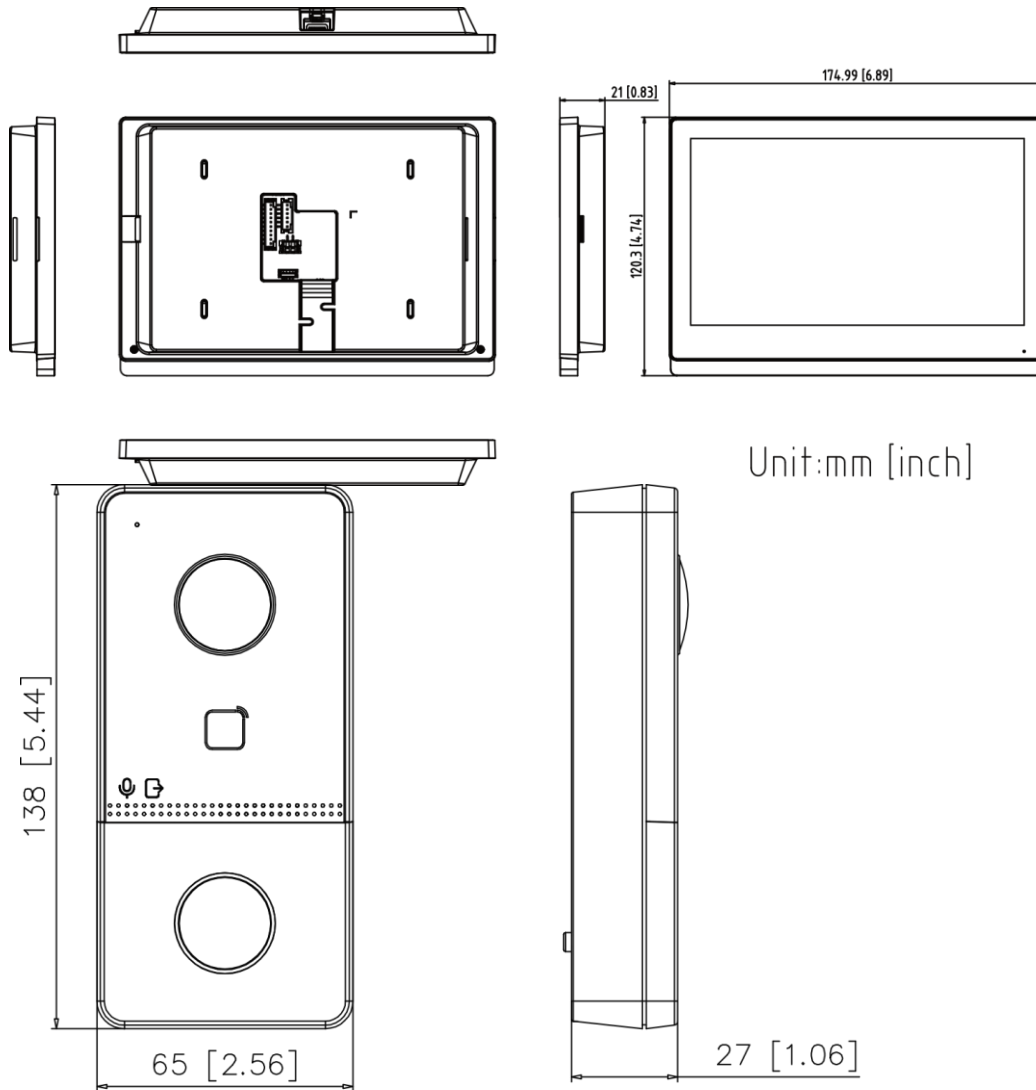
| | |
|----------------------------|-----------------------------------------------------------|
| Door station | |
| Operation system | Embedded Linux operation system |
| Flash | 32 MB |
| RAM | 256MB |
| Door station | |
| Supplement light | IR light, up to 3 m |
| Resolution | Main stream: 1920 × 1080p, 720p Sub stream: 640 × 480p |
| Lens | 2MP HD camera |
| Wide dynamic range (WDR) | Support 120 dB |
| FOV | Horizontal: 131° Vertical: 78° |
| Video Compression Standard | H.264 |
| Motion detection | Support |
| Door station | |
| Audio input | 1 built-in omnidirectional microphone |
| Audio output | 1 Built-in loudspeaker |
| Audio quality | Noise suppression and echo cancellation |
| Volume adjustment | Adjustable |
| Audio compression standard | G.711 U |
| Audio compression Rate | 64 Kbps |
| Door station | |
| Network protocol | TCP/IP, RSTP |
| Door station | |
| Network interface | 1 RJ-45, 10/100 Mbps self-adaptive |
| RS-485 | 1 |
| Alarm input | 4 |
| Lock control | 1 relay, Max. 30 VDC 2 A |
| TAMPER switch | 1 |
| Exit button | 1 |
| Door contact input | 1 |
| Door station | |
| Power consumption | < 10 W |
| Button | 1 physical button(s) |
| Working temperature | -40 °C to 55 °C(-40 °F to 131 °F) |
| Working humidity | 10% to 95% (no-condensing) |
| Dimension | 138 mm × 65 mm × 27 mm (5.4" × 2.6" × 1.1") |
| Installation | Surface mounting |
| Protection level | IP65 |
| Indicator | 2 |
| Application environment | Outdoor |
| Power supply | IEEE802.3af, standard PoE 12 VDC |
| Weight | Net weight: 0.190 kg Gross weight: 0.414 kg |

| Indoor station | |
|-----------------------------------|---------------------------------------------------------|
| Operation system | Embedded Linux operation system |
| Memory | 128 MB |
| Flash | 32 MB |
| Indoor station | |
| Display screen | 7-inch colorful TFT screen |
| Display resolution | 1024 × 600 |
| Operation method | Capacitive touch screen |
| Indoor station | |
| Audio input | 1 built-in omnidirectional microphone |
| Audio output | 1 built-in loudspeaker |
| Audio quality | Noise suppression and echo cancellation |
| Audio compression standard | G.711 U, G.711 A |
| Volume adjustment | Adjustable |
| Audio compression Rate | 64 Kbps |
| Indoor station | |
| Notice capacity | 200 |
| Linked indoor extensions capacity | 16 |
| Indoor station | |
| Protocol | TCP/IP, SIP, RTSP |
| Wi-Fi | 2.4 GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n |
| Indoor station | |
| Network interface | 1 RJ-45 10/100 Mbps self-adaptive |
| RS-485 | 1 |
| Alarm input | 8-ch alarm inputs |
| Alarm output | 2 |
| TF card | Max to 128 G |
| Indoor station | |
| Power consumption | ≤ 5 W |
| Power supply | 12 VDC, IEEE802.3af, Standard PoE |
| Working temperature | -10 °C to 50 °C (14 °F to 122 °F) |
| Working humidity | 10% to 90% |
| Dimension (L x W x H) | 175 mm × 113.5 mm × 21 mm (6.9" × 4.5" × 0.83") |
| Installation | Wall mounting, table mounting |
| Application environment | Indoor |
| Weight | Net weight: 355 g (0.8 lb) Gross weight: 683 g (1.5 lb) |

▪ Available Model




DS-KIS607-S

▪ Dimension



Unit:mm [inch]

- Accessory
- Optional

| DS-KABV6113-RS Villa Door Station Rain Shield | DS-KABH6350-T Table bracket | DS-KABV6113-A Wall-mounted bracket of villa door station |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
|  |  |  |

See Far, Go Further



www.hikvision.com
support@hikvision.com

